


SeeSnake® MAX... rM200 Series

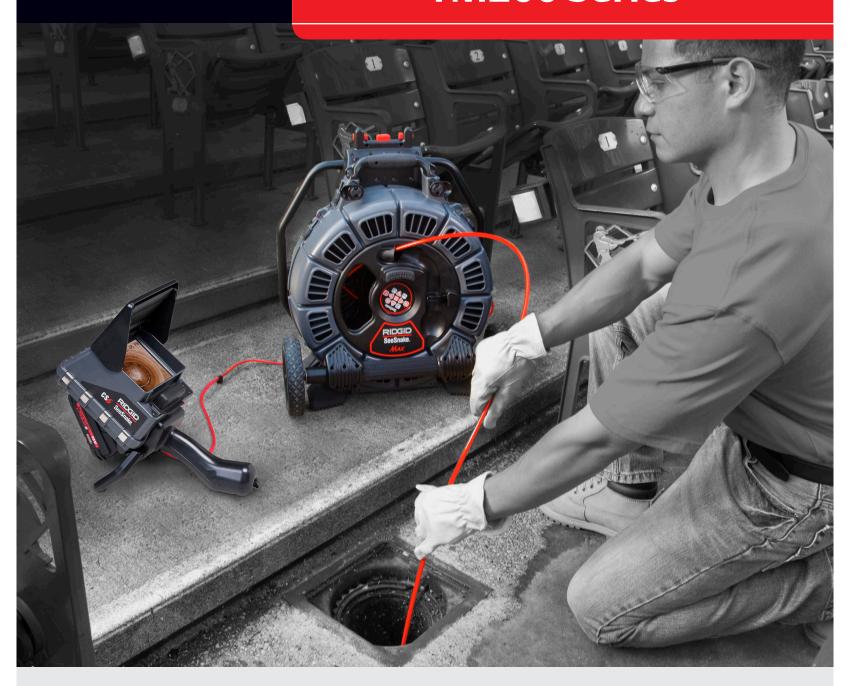

The rM200 Camera System combines portability with the versatility of the D2 drum series, offering different combinations of push cable stiffness and spring flexibility to tackle any inspection job.

Interchangeability

- The D2 drum series currently consists of the D2A and D2B drums
- The rM200 comes with your choice of drum
 - Either drum can be purchased separately
 - Own them both; quickly and easily interchanged giving you on-the-job flexibility

Pushability

- Drums feature different push cable lengths, diameters, stiffness and springs
- Chose the drum that enables you to easily negotiate turns and tees there's a drum that's right for you!

Portability

- Easy to transport; via its wheels or carry handle
- Dock the CS6 or CS65 digital monitor for convenient transport, operation and storage





SPECIFICATIONS

| | r M200A | rM200B |
|-------------------------------------|---------------------|---------------------|
| System Weight | 36.3 lb (16.5 kg) | 39.2 lb (17.8 kg) |
| Drum Weight | 16.4 lb (7.4kg) | 19.2 lb (8.7kg) |
| Drum Diameter | 17" (43.2 cm) | 17" (43.2 cm) |
| Camera | | |
| View | Self-leveling | Self-leveling |
| Length | 1"(2.6 cm) | 1" (2.6 cm) |
| Diameter | 1"(2.5 cm) | 1" (2.5 cm) |
| Light | 6 LEDs | 6 LEDs |
| Sonde | | |
| Frequency | 512 Hz | 512 Hz |
| Resolution | | |
| PAL | 768x 576 Pixels | 768 x 576 Pixels |
| Spring Assembly | | |
| Туре | Single | Dual Nested |
| Length | 12" (30.8 cm) | 17" (43.3 cm) |
| Push Cable | | |
| Length | 200' (61 m) | 165' (50 m) |
| Diameter | 0.3" (0.76 cm) | 0.35" (0.90 cm) |
| Fiberglass Core Diamet | ter0.14" (0.36 cm) | 0.18" (0.45 cm) |
| Minimum Bend Radius | 2.8" (7.1 cm) | 3.5" (8.9 cm) |
| Pipe Capacity* | 1.5" to 8" | 2" to 8" |
| | (3.8 cm to 20.3 cm) | (5.1 cm to 20.3 cm) |

ORDER INFORMATION

| CATALOG NO. | MODEL NO. | DESCRIPTION | | GHT (kg) |
|----------------|-----------------|---|------|-------------|
| 47163 | rM200A & CS6 | Kit, SeeSnake MAX rM200A w/D2A Drum & CS6 Monitor & 1 18V Battery, 1 230V Charger, 1 AC Adapter | 42.3 | 19.2 |
| 42353 | rM200A | Reel, SeeSnake MAX rM200A w/D2A Drum | 36.3 | 16.5 |
| 47533 | rM200B | Reel, SeeSnake MAX rM200B w/D2B Drum | 39.2 | 17.8 |
| 47553 | rM200 | Drum, rM200 D2A | 16.4 | 7.4 |
| 47543 | rM200 | Drum, rM200 D2B | 19.2 | 8.7 |



rM200 D2A Catalog No. 47553









rM200 D2B Catalog No. 47543



*When used with a 5" (12.5 cm) pipe guide.



Designed to be used with CS6 or CS65 Digital Monitors docked on the reel, compatible with any other SeeSnake monitor.

DISTRIBUTOR

Tel.: +32 (0)16 380 280 Fax: +32 (0)16 380 381 ridgid.info@emerson.com www.RIDGID.com

